

A

Express Mail No. EL 493861638US
Docket No. C34037/119442

jc808 U.S. PRO
09/658696
09/08/00

Sir:

Sung Bae MOON

For: **“RADIO FREQUENCY TRANSMITTING DEVICE OF MOBILE
RADIO COMMUNICATION BASE STATION SYSTEM IN CODE
DIVISION MULTIPLE ACCESS SYSTEM”**

1. [X] The application has 21 pages (including claim pages and abstract).
2. [X] Seven sheets of drawings are enclosed. The drawings (Figs. 1-7) are:
 - a. [] formal; or
 - b. [X] informal; formal drawings will be submitted in due course.
3. [] The declaration and power of attorney
 - a. [X] has been executed by all the inventors; or
 - b. [] has not been executed by all the inventors. An executed declaration and power of attorney will be submitted in due course.
 - c. [] will follow.
4. [] An associate power of attorney is enclosed.
5. [X] An assignment of the invention to Hyundai Electronics and a Recordation Form Cover are enclosed. Please record the Assignment and return it to the undersigned. A duplicate copy of this paper is enclosed.
 - a. [X] A check for \$40 to cover the recording fee is enclosed. See paragraph 10.c., below.
 - b. [] Please charge the recording fee to our Deposit Account No. 02-4467. A duplicate copy of this paper is enclosed.
6. [X] Priority is hereby claimed under 35 USC Section 119.

- a. ☒ A certified copy of the priority document is enclosed.
- b. ☐ The certified priority document(s) will follow.
7. ☐ A verified statement to establish small entity status under 37 CFR Section 1.9 and 37 CFR Section 1.27 is enclosed.
8. ☒ The filing fee is calculated below.

	Col. 1	Col. 2	SMALL ENTITY			LARGE ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE		RATE	FEE
BASIC FEE				\$380.00	OR		\$690.00
TOTAL CLAIMS	14- 20 =	*0	x 9.00	0.00	OR	x 18.00	0.00
INDEP. CLAIMS	3-3	*0	x 39.00	0.00	OR	x 78.00	0.00
MULTIPLE DEPENDENT CLAIM PRESENTED			+ \$130.00	0.00	OR	+ \$260.00	\$690.00
*If the difference in Col. 1 is less than zero, enter "0" in Col. 2							
Total: \$690.00							


- a. ☒ A check for \$690 to cover the filing fee is enclosed. See paragraph 10a and 10d, below.
- b. ☐ Please charge Deposit Account No. 02-4467 in the amount of \$____. A duplicate copy of this paper is enclosed.
9. ☒ A Preliminary Amendment is enclosed.
- a. ☒ No additional fee is due.
- b. ☐ A check in the amount of \$____ to cover the cost of additional claims is enclosed. See paragraph 10.a., below.
- c. ☐ Please charge our Deposit Account 02-4467 in the amount of \$____. A duplicate copy of this paper is enclosed.
10. ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this application or with recording any Assignment concerning it, or to credit any overpayment, to Deposit Account No. 02-4467, unless otherwise paid by check.
- a. ☒ If our check is missing or otherwise insufficient, or if any additional fees are required, the Commissioner is authorized to charge (or credit any overpayment) to Deposit Account No. 02-4467. A duplicate copy of this paper is enclosed.

- b. ☒ Any additional filing or other fees required under 37 CFR Section 1.16, including any fees for presentation of extra claims.
- c. ☒ Any patent application processing fees under 37 CFR Section 1.17.
- d. ☒ Any additional Assignment recording fees under 37 CFR Section 1.21(h).

Note: See 37 CFR Section 1.311(b) regarding authorization to pay the issue fee from deposit account.

- 11. ☒ An Information Disclosure Statement is enclosed.

Respectfully submitted,

By: 
Lawrence G. Kurland
Registration No. 24,895
BRYAN CAVE LLP
245 Park Avenue
New York, New York 10167-0034
(212) 692-1800

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Sung Bae MOON)
Serial No.: To Be Assigned) Examiner: To Be Assigned
Filed: September 8, 2000) Art Unit: To Be Assigned
)



For: **RADIO FREQUENCY TRANSMITTING
DEVICE OF MOBILE RADIO
COMMUNICATION BASE STATION
SYSTEM IN CODE DIVISION
MULTIPLE ACCESS SYSTEM**

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Mailing Label No.: EL 493861638US

Date of Deposit: September 8, 2000

I hereby certify that the following:

- ☒ This Certificate of Express Mailing
- ☒ Transmittal letter in duplicate (6 pages)
- ☒ Patent application consisting of 21 pages of abstract, specification, and claims
- ☒ Executed Declaration and Power of Attorney
- ☒ Seven sheets of informal drawings (containing Figs. 1-7)
- ☒ Check in the amount of \$690 to cover Filing Fee
- ☒ Return postcard
- ☒ Preliminary Amendment
- ☒ Transmittal of Priority & Korean Priority Appln. No. 99-39093
- ☒ Information Disclosure Statement, PTO Form 1449 & References
- ☒ Executed Assignment & Assignment Recordation Sheet
- ☒ Check in the amount of \$40 to cover Assignment Fee

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR Section 1.10 on the Date of Deposit indicated above in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231, Attention: Box Patent Application.

Eric Morales

Signature: Eric Morales

BRYAN CAVE LLP
245 Park Avenue
New York, New York 10167-0034
212/692-1800

In re Application of: Sung Bae MOON)

)

)

Serial No.: To Be Assigned)

)

Filed: September 8, 2000

)

September 8, 2000

Sir:

IN THE CLAIMS

Please add the following claim:

253031

to the N-1th digital modulator and primarily coupled to the modulated signal corresponding to the N-1th frequency assignment in the N-1th digital modulator, and the primarily coupled N+(N-1)th frequency assignment modulated signal is outputted to the N-2th digital modulator and secondarily coupled to the modulated signal corresponding to the N-2th frequency assignment in the N-2th digital modulator, whereby the secondarily coupled multi-frequency assignment modulated signal is outputted to said D/A converter.

REMARKS

This amendment is being submitted to eliminate the multiple dependency of claim 5. Claim 5 has been made dependent only on claim 1 and new claim 14 is the same as claim 5 but dependent on claim 2.

No new matter has been added, and the entry of the foregoing amendment is respectfully requested.

Respectfully submitted,

By: 

Lawrence G. Kurland Esq.

Reg. No. 24,895

BRYAN CAVE LLP

245 Park Avenue

New York, New York 10167-0034

(212) 692-1800

RADIO FREQUENCY TRANSMITTING DEVICE OF MOBILE
RADIO COMMUNICATION BASE STATION SYSTEM IN
CODE DIVISION MULTIPLE ACCESS SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a radio frequency (hereinafter, referred to simply as RF) transmitting device of a mobile radio communication base station system in a code division multiple access system (hereinafter, referred to simply as CDMA) and more particularly, to an RF transmitting device of a mobile radio communication base station system in a CDMA system which is capable of digital-modulating baseband signals which are converted into band spread signals by using the same path which three frequency assignment frequency signals have for an RF in a multi-carrier mobile radio communication system supporting three frequency assignment, digital-coupling the modulated signals, and up-converting the digital-coupled signal into an intermediate frequency signal and an RF signal in a sequential order, thereby transmitting the up-converted signal.

Discussion of Related Art

A general mobile radio communication base station system in a CDMA system includes a switching system and a cell equipment. Of course, the above system contains a large number of functional devices which are all embodied with various kinds of equipments.

The key part of the mobile radio communication base station system is composed of a channel card, a sector interface card, an analog common card and a digital shelf on which a terminal card is packaged. Additionally, it contains a transceiver shelf which up-converts an IF signal outputted from the digital shelf in an ultra high frequency (UHF) signal and

reversely, down-converts the UHF signal into the IF signal. In the transceiver shelf the sector interface card is installed to couple baseband forward signals received from the channel cards and up-convert the coupled signal into the IF signal. The sector interface card receives the coupled baseband transmitting signals coupled from the analog common cards and couples and amplifies the received signals. The coupled signal is coupled, through a low-pass filter (LPF), to the IF signal, i.e., the delayed signal by the phase of 0° and 90° of 4.95MHz and transmitted as the IF signal of 4.95MHz, through a band-pass filter (BPF), to an RF rack. Therefore, the RF rack converts the received IF signal of 4.95MHz into the UHF signal, for transmitting the converted signal through an antenna.

Referring to Figs. 1 and 2, now, an explanation of the construction and operation of the general mobile radio communication base station system will be discussed.

amplifies the converted UHF signal to a predetermined level to thereby execute space-radiation for the amplified UHF signal. The RF unit 6 is divided into an RF receiving device and an RF transmitting device.

Fig. 2 is a block diagram illustrating a prior art RF transmitting device of a digital mobile radio communication base station system in a CDMA system.

As shown, the conventional RF transmitting device comprises: three channel cards 11, 12 and 13 which output digital baseband signals for supporting three frequency assignment to I/Q (in-phase/quadrature) channels by each frequency assignment; three analog processors 20, 30 and 40 which are correspondingly connected to the channel cards 11, 12 and 13, convert the baseband signals on the I/Q channels by each frequency assignment into analog signals, and execute a quadrature phase shifting keying (QPSK) modulation for each of the converted analog baseband signals to thereby output the modulated signal; three analog up-converters 50, 60 and 70 which are correspondingly connected to the three analog processors 20, 30 and 40, convert the modulated signals by each frequency assignment outputted from the three analog processors 20, 30 and 40 into IF signals, and convert the converted IF signals into transmitting frequency (RF) signals to thereby output the converted RF signals; a transmitting signal coupler 80 which couples the RF signals by the frequency assignment outputted from the three analog up-converters 50, 60 and 70 and outputs the coupled signal on a single path, and a transmitting unit 90 which amplifies the RF signal outputted from the transmitting signal coupler 80 to a predetermined level, limits the frequency band of the RF signal to prevent the affect on the frequency used in another communication system and transmits the band-limited RF signal via an antenna. In this case, the baseband signals, which are outputted from the three channel cards 11, 12 and 13, that is, the channel cards by the frequency assignment are 0FA-I, 0FA-Q, 1FA-I, 1FA-Q, 2FA-I and 2FA-Q.

The three analog processors 20, 30 and 40 by the frequency assignment 0FA, 1FA

and 2FA include D/A converters 21, 31 and 41 for converting the baseband signals outputted from the channel cards 11, 12 and 13 into the analog signals and analog modulators 22, 32 and 42 for executing the QPSK modulation for the analog baseband signals outputted from the D/A converters 21, 31 and 41 to thereby up-convert the modulated signal into a frequency signal of 4.95MHz. Each of the three analog up-converters 50, 60 and 70 by the frequency assignment contains local oscillators and mixers (which are not shown in the drawing). And, the three analog up-converters 50, 60 and 70 by the frequency assignment comprise: first frequency up-converters 51, 61 and 71 for up-converting the frequency signals of 4.95MHz outputted from the analog modulators 22, 32 and 42 into the IF signals by using the corresponding local oscillator and mixer; channel filters 52, 62 and 72 for filtering the IF signals outputted from the first frequency up-converters 51, 61 and 71 with a frequency bandwidth of 1.25MHz to thereby output the filtered signals; and second frequency up-converters 53, 63 and 73 for up-converting the filtered signals in the channel filters 52, 62 and 72 into the RF signal by using the corresponding local oscillator and mixer. In this case, the local oscillator in each of the second frequency up-converters 53, 63 and 73 is, preferably, a variable local oscillator for channel division.

Under the above construction, an explanation of the operation of the conventional RF transmitting device will be discussed.

First, the channel cards 11, 12 and 13 by each frequency assignment output the CDMA digital signals to the D/A converters 21, 31 and 41 of the analog processors 20, 30 and 40 through the I/Q channels by each frequency assignment 0FA-I, 0FA-Q, 1FA-I, 1FA-Q, 2FA-I and 2FA-Q. At this time, the output signals are the baseband signals. The baseband signals on the I/Q channels outputted from the channel cards 11, 12 and 13 are converted into the analog signal by means of the D/A converters 21, 31 and 41 and then outputted to the analog modulators 22, 32 and 42. The QPSK modulation on the I/Q

channels for the analog baseband signals outputted from the D/A converters 21, 31 and 41 is executed in the analog modulators 22, 32 and 42, respectively. Then, the signals on the I/Q channels by each frequency assignment are coupled and transmitted to the first frequency up-converters 51, 61 and 71 of the analog frequency up-converters 50, 60 and 70. At this time, the baseband signals are up-converted into the frequency signal of 4.95MHz. The first frequency up-converters 51, 61 and 71 of the analog frequency up-converters 50, 60 and 70 convert the signals which are made by coupling the signals on the I/Q channels into the IF signal by using the local oscillator and mixer and transmit the converted IF signals to the channel filters 52, 62 and 72. In other words, the coupled signal on the I/Q channels and the local frequency generated from the local oscillator are mixed by means of the mixer and then converted into the IF signal. The converted IF signals, from which the signals being out of the frequency band by each frequency assignment are filtered by means of the channel filters 52, 62 and 72 to thereby protect the transmitting signals thereof, are outputted to the second frequency up-converters 53, 63 and 73. At this time, the channel filters 52, 62 and 72 are, preferably, a surface acoustic wave (SAW) filter having the bandwidth of 1.25MHz. Next, the second frequency up-converters 53, 63 and 73 convert the IF signals outputted from the channel filters 52, 62 and 72 into the RF signals by using the local oscillator and output the converted RF signals by the frequency assignment to the transmitting signal coupler 80. At this time, the local oscillator, which is used in the second frequency up-converters 53, 63 and 73, respectively, is a variable local oscillator for channel division. Therefore, the signal of each local oscillator is generated at the frequency intervals of each frequency assignment. The three frequency assignment signals, which have been converted into the RF signals, are coupled in the transmitting signal coupler 80 and outputted to the transmitting unit 90. Finally, the transmitting unit 90 amplifies the coupled RF signal outputted from the transmitting signal coupler 80 to the predetermined level via a low-power amplifier (which is omitted in the drawing), limits the frequency band of the RF

signal to prevent the affect on the frequency used in another communication system and transmits the RF signal via the antenna.

However, the conventional RF transmitting device of the mobile radio communication base station system in the CDMA system suffers from problems that the production cost increases, because the hardware for converting the baseband signal into the RF signal is constructed separately by each frequency assignment, that the size of system is bulky, because the construction is complicated, and that the stability of system to temperature and time becomes deteriorated, because the process for up-converting the baseband signal into the IF signal is carried out in an analog manner. Additionally, the conventional RF transmitting device suffers from problems that it is difficult to extend the frequency assignment, the hardware configuration is complicated, and that the expense increases, because the frequency up-converting process is carried out by each frequency assignment and the extension of the frequency assignment is made each frequency assignment.

SUMMARY OF THE INVENTION

An object of the invention is to provide an RF transmitting device of a mobile radio communication base station system in a CDMA system which is capable of digital-modulating baseband signals which are converted into band spread signals by using the same path which three frequency assignment frequency signals have for an RF in a multi-carrier mobile radio communication system supporting three frequency assignment, digital-coupling the modulated signals, and up-converting the digital-coupled signal into an IF signal and an RF signal in a sequential order, thereby transmitting the up-converted signal.

According to an aspect of the present invention, there is provided an RF transmitting device of a mobile radio communication base station system in a CDMA

assignment analog signal outputted from the D/A converter into an arbitrary IF signal, a band-pass filter for band-pass filtering the coupled multi-frequency assignment IF signal outputted from the first frequency up-converter to an arbitrary bandwidth, and a second frequency up-converter for converting the multi-frequency assignment IF signal filtered in the band-pass filter into an RF signal to thereby output the converted RF signal to a transmitting unit; and the transmitting unit for amplifying the secondarily up-converted RF signal in the analog frequency up-converting unit to an arbitrary transmitting output level and transmitting the amplified signal via the transmitting antenna.

BRIEF DESCRIPTION OF THE ATTACHED DRAWINGS

Fig. 1 is a block diagram illustrating the construction of a general mobile radio communication base station system;

Fig. 2 is a block diagram illustrating the construction of a prior art RF transmitting device of a mobile radio communication base station system in a CDMA system;

Fig. 3 is a block diagram illustrating an RF transmitting device of a mobile radio communication base station system in a CDMA system according to a first embodiment of the present invention;

Fig. 4 is an exemplary view illustrating the preferred embodiment of the plurality of digital modulators in Fig. 3;

Fig. 5 is a waveform diagram illustrating the signal waveform of a frequency region when the digital modulated three frequency assignment signals are coupled;

Fig. 6 is a block diagram illustrating an RF transmitting device of a mobile radio communication base station system in a CDMA system according to a second embodiment of the present invention; and

Fig. 7 is an exemplary view illustrating the preferred embodiment of the plurality of digital modulators in Fig. 6.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Hereinafter, an explanation of the construction and operation of an RF transmitting device of a mobile radio communication base station system in a CDMA system according to first and second embodiments of the present invention will be in detail discussed with reference to Figs. 3 to 7. On the other hand, an explanation of the same components as in the prior art of Fig. 2 will be omitted for the brevity of the description.

[First Embodiment]

Fig. 3 is a block diagram illustrating an RF transmitting device of a mobile radio communication base station system in a CDMA system according to a first embodiment of the present invention, Fig. 4 is an exemplary view illustrating the preferred embodiment of the plurality of digital modulators in Fig. 3, and Fig. 5 is a waveform diagram illustrating the signal waveform of a frequency region when the digital modulated three frequency assignment signals are coupled. In construction, the RF transmitting device according to the first embodiment of the present invention comprises a digital unit 100 for digital-modulating the baseband signals on the I/Q channels outputted from three channel cards 11, 12 and 13 by frequency assignment, coupling the digital-modulated signals by the frequency assignment, and then converting the coupled multi-frequency assignment digital modulated signal into an analog signal, an analog frequency up-converting unit 110 for primarily up-converting the analog-converted multi-frequency assignment signal in the digital unit 100 into an IF signal and for secondarily up-converting the converted IF signal into an RF signal, and a transmitting unit 90 for amplifying the RF signal outputted from the analog frequency up-converting unit 110 to an arbitrary transmitting output level and transmitting the amplified signal via an antenna. The digital unit 100 includes digital modulators 101, 102 and 103 for executing a QPSK modulation for the CDMA baseband signals outputted from the channel cards 11, 12 and 13 by the frequency assignment, a

coupler 105 for coupling the three frequency assignment signals modulated respectively in the digital modulators 101, 102 and 103, and a D/A converter 104 for converting the coupled three frequency assignment QPSK modulated signal in the coupler 105 into the analog signal to thereby output the converted analog signal to the analog frequency up-converting unit 110.

Each of the digital modulators 101, 102 and 103 comprises, as shown in Fig. 4, low-pass filters a and a' for filtering the baseband signals on the I/Q channels outputted from the channel cards 11, 12 and 13 by the frequency assignment, interpolation filters c and c' for filtering the filtered baseband signals on the I/Q channels, a digital local oscillator b for outputting arbitrary local frequencies having the phase difference of 90° , mixers d and d' for mixing each of the local frequencies having the phase of 0° and 90° and each of the baseband signals on the I/Q channels which are sequentially passed through the low-pass filters a and a' and the interpolation filters c and c' and for executing the QPSK modulation for the output baseband signals, and an adder e for adding the QPSK modulated signals on the I and Q channels. The local frequencies generated from the digital local oscillator b within each of the digital modulators 101, 102 and 103 are generated at frequency assignment intervals, that is, the frequency of 1.25MHz intervals. The analog frequency up-converting unit 110 comprises a first frequency up-converter 111 for up-converting the coupled three frequency assignment analog signal outputted from the D/A converter 104 of the digital unit 100 into an arbitrary IF signal, a band-pass filter 112 for filtering the coupled three frequency assignment IF signal outputted from the first frequency up-converter 111 to pass through only the frequency bandwidth of 3.75MHz, and a second frequency up-converter 113 for converting the IF signal filtered in the band-pass filter 112 into an RF signal to thereby output the converted RF signal to the transmitting unit 90. In this case, the first frequency up-converter 111 includes a local oscillator for generating a fixed local frequency to thereby convert the analog signal outputted from the D/A converter 104 of the

assignment 1FA uses the local frequency of 11.25MHz and the digital local oscillator b of the digital modulator 103 in the frequency assignment 3FA uses the local frequency of 12.50MHz.

The digital-modulated and added signals on the I/Q channels in the digital modulators 102, 103 and 104 by the frequency assignments are coupled by means of the coupler 105. In this case, the signal waveform on the frequency region obtained by coupling and simulating the digital-modulated three frequency assignment signals is shown in Fig. 4.

a low-power amplifier of the transmitting unit 90. Then, the bandwidth of the transmitting output signal is limited to prevent the affect on the frequency used in another communication system and the band-limited RF signal is then transmitted via the antenna.

[Second Embodiment]

Fig. 6 is a block diagram illustrating an RF transmitting device of a mobile radio communication base station system in a CDMA system according to a second embodiment of the present invention. On the other hand, an explanation of the same components as in the prior art of Fig. 1 and in the first embodiment of the present invention of Fig. 3 will be omitted for the brevity of the description.

As shown, an RF transmitting device of a mobile radio communication base station system in a CDMA system according to the second embodiment of the present invention does not include the coupler 105 of the digital unit 100 in Fig. 3. In addition, the digital modulator 103 for the frequency assignment 2FA is configured in the same manner as in Fig. 4 and as shown in Fig. 7, the digital modulators 101 and 102 for the frequency assignment 0FA and 1FA are configured by adding an adder f in Fig. 4. In other words, the modulated signal in the adder e of the digital modulator 103 for the frequency assignment 2FA is outputted to the adder f in the digital modulator 102 for the frequency assignment 1FA and primarily coupled to the modulated and coupled signal in the I/Q channels in the adder e in the digital modulator 102 for the frequency assignment 1FA. Then, the primarily coupled signal ($2FA + 1FA$) in the adder f of the digital modulator 102 for the frequency assignment 1FA is outputted to the adder f in the digital modulator 101 for the frequency assignment 0FA. Therefore, the adder f in the digital modulator 101 for the frequency assignment 0FA performs a secondary coupling of the primarily coupled signal for the frequency assignment 2FA and 1FA outputted from the adder f of the digital modulator 102 for the frequency assignment 1FA with the coupled signal on the I/Q channels for the frequency assignment 0FA outputted from the adder e of the digital modulator 101, thereby

outputting the secondarily coupled signal ($0FA + 1FA + 2FA$) for each frequency assignment to the D/A converter 104.

Hereinafter, a brief explanation of the operation for the RF transmitting device in the mobile radio communication system of the CDMA system according to the first and second embodiments of the present invention will be discussed.

First, if the baseband signals on the I/Q channels for each frequency assignment are transmitted in the channel cards 101, 102 and 103, the digital modulators 101, 102 and 103 execute the digital modulation for the baseband signals for each FA. The modulated frequency signals for each frequency assignment are serial or parallel-coupled in the coupler 105. At this time, the digital local oscillator b for each frequency assignment used for the modulation in the digital modulators 101, 102 and 103 generates the local frequency at the frequency assignment intervals (1.25MHz). Therefore, the up-converted digital signal can maintain the channel interval of the frequency assignment. The serial or parallel-coupled digital signal is converted into the analog signal in the D/A converter 104 and the converted analog signal is up-converted into the IF signal in the first frequency up-converter 111 of the analog frequency up-converting unit 110. The converted IF signal is filtered in the SAW filter 112 having the bandwidth of the 3.75MHz and then applied to the second frequency up-converter 113, in which the filtered IF signal is up-converted into the RF signal. At this time, the local oscillator within the second frequency up-converter 113 generates the fixed local frequency, when compared with that in the prior art which generates different local frequencies for each frequency assignment. The converted RF signal in the second frequency up-converter 113 is applied to the transmitting unit 90 and amplified to a final output level in the transmitted terminal of the base station, thereby being transmitted through the antenna.

As clearly appreciated from the above, an RF transmitting device of a mobile radio communication base station system in a CDMA system according to the present invention

is capable of digital-modulating baseband signals which are converted into band spread signals by using the same path which three frequency assignment frequency signals have for an RF in a multi-carrier mobile radio communication system supporting three frequency assignment, digital-coupling the modulated signals, and up-converting the digital-coupled signal into an IF signal and an RF signal in a sequential order, thereby transmitting the up-converted signal, whereby the digital region is extended up to the RF and the RF processing system operates stably relative to temperature and time.

Additionally, since the three frequency assignment frequency has the same path as an RF in the system supporting three frequency assignment, the whole base station system as well as the RF transmitting device are configured in a simple manner and thereby, the unnecessary cost consumption can be prevented.

Moreover, since the frequency assignment can be extended by three frequency assignment, the extension of the frequency assignment is carried out easily.

What is claimed is:

1. An RF transmitting device of a mobile radio communication base station system in a CDMA system having a plurality of channel cards providing baseband signals on I/Q channels for multi-frequency assignment and a transmitting antenna, said RF transmitting device comprising:

a digital unit for digital modulating the baseband signals on the I/Q channels by each frequency assignment provided from said plurality of channel cards, coupling the digital modulated signals by the frequency assignment, and then converting the coupled multi-frequency assignment digital modulated signal into an analog signal;

an analog frequency up-converting unit for primarily up-converting the analog-converted multi-frequency assignment signal in said digital unit into an IF signal and a secondarily up-converting the converted IF signal into an RF signal; and

a transmitting unit for amplifying the secondarily up-converted RF signal to an arbitrary transmitting output level and transmitting the amplified signal via said transmitting antenna.

2. The RF transmitting device as claimed in claim 1, wherein said digital unit comprises: a plurality of digital modulators for executing a QPSK modulation for each of the CDMA baseband signals outputted from said plurality of channel cards by the frequency assignment; a coupler for coupling the each frequency assignment signals modulated in said plurality of digital modulators; and a D/A converter for converting the coupled each frequency assignment QPSK modulated signal in said coupler into an analog signal to thereby output the converted analog signal to said analog frequency up-converting unit.

3. The RF transmitting device as claimed in claim 1, wherein each of said plurality of digital modulators comprises: a plurality of low-pass filters for low-pass filtering the baseband signals on the I/Q channels outputted from each of said plurality of channel cards by the frequency assignment; a plurality of interpolation filters for filtering the low-pass

filtered baseband signals on the I/Q channels; a digital local oscillator for outputting arbitrary local frequencies having the phase difference of 90; a plurality of mixers for mixing each of the local frequencies having the phase of 0 and 90 generated from said local oscillator and each of the baseband signals on the I/Q channels which are sequentially passed through said plurality of low-pass filters and said plurality of interpolation filters; and an adder for adding the mixed signals on the I and Q channels in said plurality of mixers.

4. The RF transmitting device as claimed in claim 3, wherein said local frequencies generated from said digital local oscillator within each of said plurality of digital modulators are generated at frequency assignment intervals, that is, the frequency of 1.25MHz intervals.

5. The RF transmitting device as claimed in claim 1 or 2, wherein the modulated signals by each frequency assignment in said digital unit are coupled serially in the same manner that the modulated signal in the Nth digital modulator of said plurality of digital modulators is outputted to the N-1th digital modulator and primarily coupled to the modulated signal corresponding to the N-1th frequency assignment in the N-1th digital modulator, and the primarily coupled N+(N-1)th frequency assignment modulated signal is outputted to the N-2th digital modulator and secondarily coupled to the modulated signal corresponding to the N-2th frequency assignment in the N-2th digital modulator, whereby the secondarily coupled multi-frequency assignment modulated signal is outputted to said D/A converter.

6. The RF transmitting device as claimed in claim 1, wherein said analog frequency up-converting unit comprises: a first frequency up-converter for up-converting the coupled multi-frequency assignment analog signal outputted from said digital unit into an arbitrary IF signal; a band-pass filter for band-pass filtering the coupled multi-frequency assignment IF signal outputted from said first frequency up-converter to an arbitrary frequency

bandwidth; and a second frequency up-converter for converting the IF signal filtered in said band-pass filter into an RF signal to thereby output the converted RF signal to said transmitting unit.

7. The RF transmitting device as claimed in claim 6, wherein said first frequency up-converter comprises: a first local oscillator for generating a fixed local frequency to convert the analog signal inputted into the IF signal; and a first mixer for mixing the fixed local frequency signal generated from said first local oscillator and the analog signal inputted and converting the mixed result into the IF signal having a constant center frequency of the multi-frequency assignment band.

8. The RF transmitting device as claimed in claim 6, wherein said band-pass filter is an SAW filter having the bandwidth of 3.75MHz, in order to accurately pass the multi-frequency assignment coupled signal.

9. The RF transmitting device as claimed in claim 6, wherein said second frequency up-converter comprises: a second local oscillator for generating a fixed local frequency to convert the filtered IF signal inputted into the RF signal; and a second mixer for mixing the fixed local frequency signal generated from said second local oscillator and the IF signal and converting the mixed result into the RF signal having a constant center frequency of the multi-frequency assignment band.

10. An RF transmitting device of a mobile radio communication base station system in a CDMA system having a plurality of channel cards providing baseband signals on I/Q channels for multi-frequency assignment and a transmitting antenna, said RF transmitting device comprising:

a plurality of digital modulators for performing a QPSK modulation for each of the CDMA baseband signals outputted from the plurality of channel card by each frequency assignment;

a coupler for coupling the digital modulated signals by the frequency assignment in

the plurality of digital modulators by the frequency assignment;

a D/A converter for converting the coupled multi-frequency assignment QPSK modulated signal in said coupler into an analog signal and outputting the converted analog signal to an analog frequency up-converting unit;

said analog frequency up-converting unit comprising a first frequency up-converter for converting the multi-frequency assignment analog modulated signal outputted from said D/A converter into an arbitrary IF signal, a band-pass filter for filtering the up-converted multi-frequency assignment IF signal in said first frequency up-converter to an arbitrary bandwidth, and a second frequency up-converter for converting the filtered multi-frequency assignment IF signal in said band-pass filter into an RF signal to thereby output the converted RF signal to a transmitting unit; and

said transmitting unit for amplifying the up-converted RF signal in said second frequency up-converter of said analog frequency up-converting unit to an arbitrary transmitting output level and transmitting the amplified signal via said transmitting antenna.

11. The RF transmitting device as claimed in claim 10, wherein said band-pass filter is an SAW filter having the bandwidth of 3.75MHz, in order to accurately pass the multi-frequency assignment coupled signal.

12. An RF transmitting device of a mobile radio communication base station system in a CDMA system having a plurality of channel cards providing baseband signals on I/Q channels for multi-frequency assignment and a transmitting antenna, said RF transmitting device comprising:

a plurality of digital modulators by frequency assignment for executing a QPSK modulation for each of the CDMA baseband signals outputted by said plurality of channel cards and serially coupling the QPSK modulated signal in a most significant frequency assignment or a least significant frequency assignment with the QSPK modulated signal in a more significant frequency assignment or a less significant frequency assignment, in a

sequential order, to thereby output a digital modulated signal in a multi-frequency assignment band;

a D/A converter for converting the coupled multi-frequency assignment QPSK modulated signal outputted from the most significant frequency assignment or the least significant frequency assignment digital modulator into an analog signal to thereby output the converted analog signal to an analog frequency up-converting unit;

said analog frequency up-converting unit comprising a first frequency up-converter for up-converting the coupled multi-frequency assignment analog signal outputted from said D/A converter into an arbitrary IF signal, a band-pass filter for band-pass filtering the coupled multi-frequency assignment IF signal outputted from said first frequency up-converter to an arbitrary bandwidth, and a second frequency up-converter for converting the multi-frequency assignment IF signal filtered in said band-pass filter into an RF signal to thereby output the converted RF signal to a transmitting unit; and

said transmitting unit for amplifying the up-converted RF signal in said second frequency up-converter of said analog frequency up-converting unit to an arbitrary transmitting output level and transmitting the amplified signal via said transmitting antenna.

13. The RF transmitting device as claimed in claim 12, wherein said band-pass filter is an SAW filter having the bandwidth of 3.75MHz, in order to accurately pass the multi-frequency assignment coupled signal.

Abstract

Disclosed is an RF transmitting device of a mobile radio communication base station system in a CDMA system capable of digital-modulating baseband signals which are converted into band spread signals by using the same path which three frequency assignment frequency signals have for an RF in a multi-carrier mobile radio communication system supporting three frequency assignment, digital-coupling the modulated signals, and up-converting the digital-coupled signal into an IF signal and an RF signal in a sequential order, thereby transmitting the up-converted signal.

FIG. 2 (PRIOR ART)

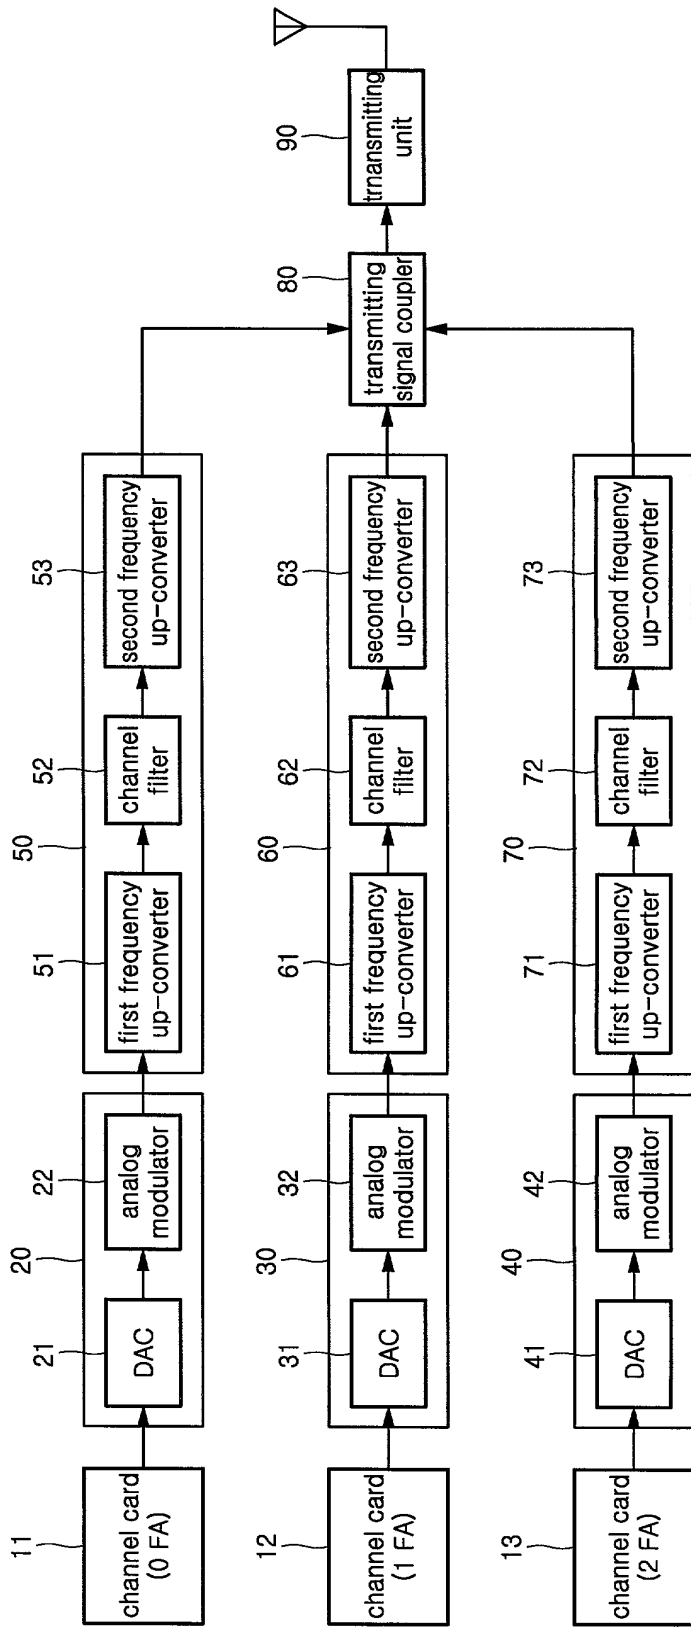


FIG. 4

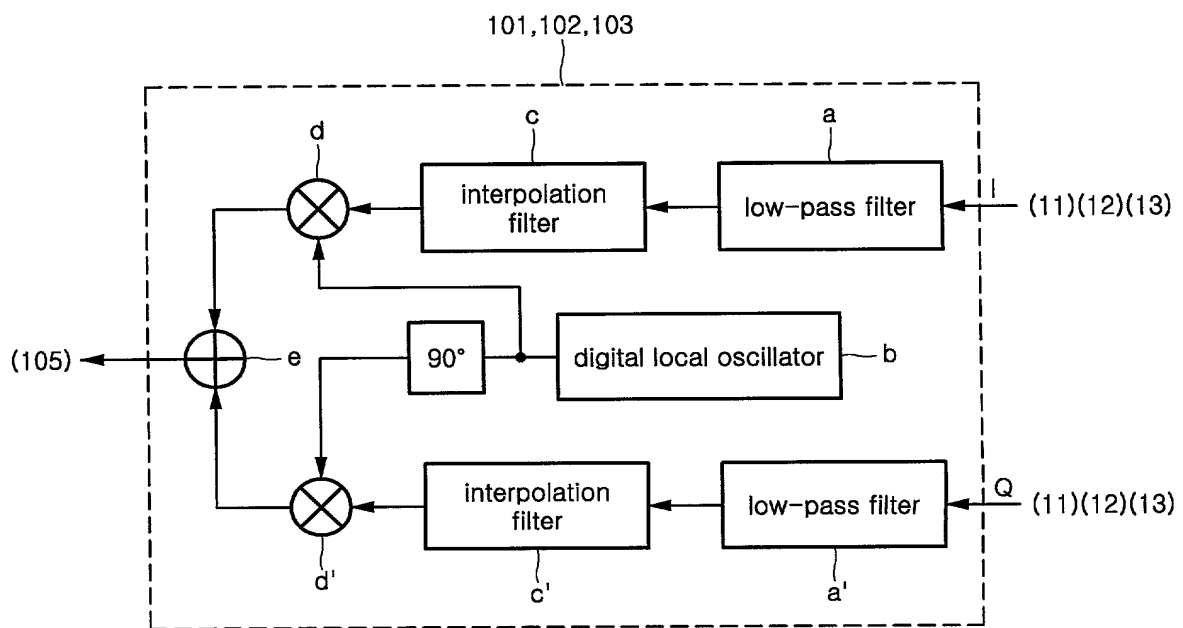


FIG. 5

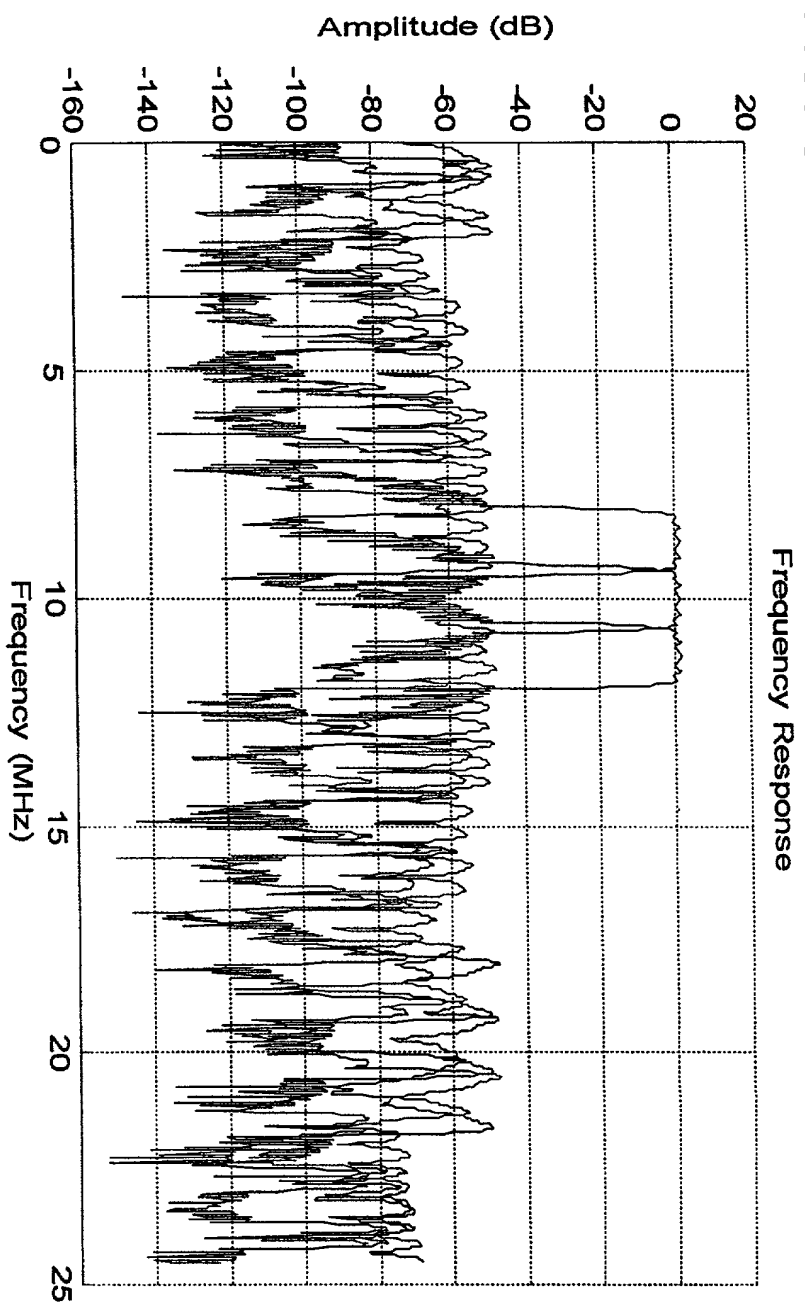


FIG. 6


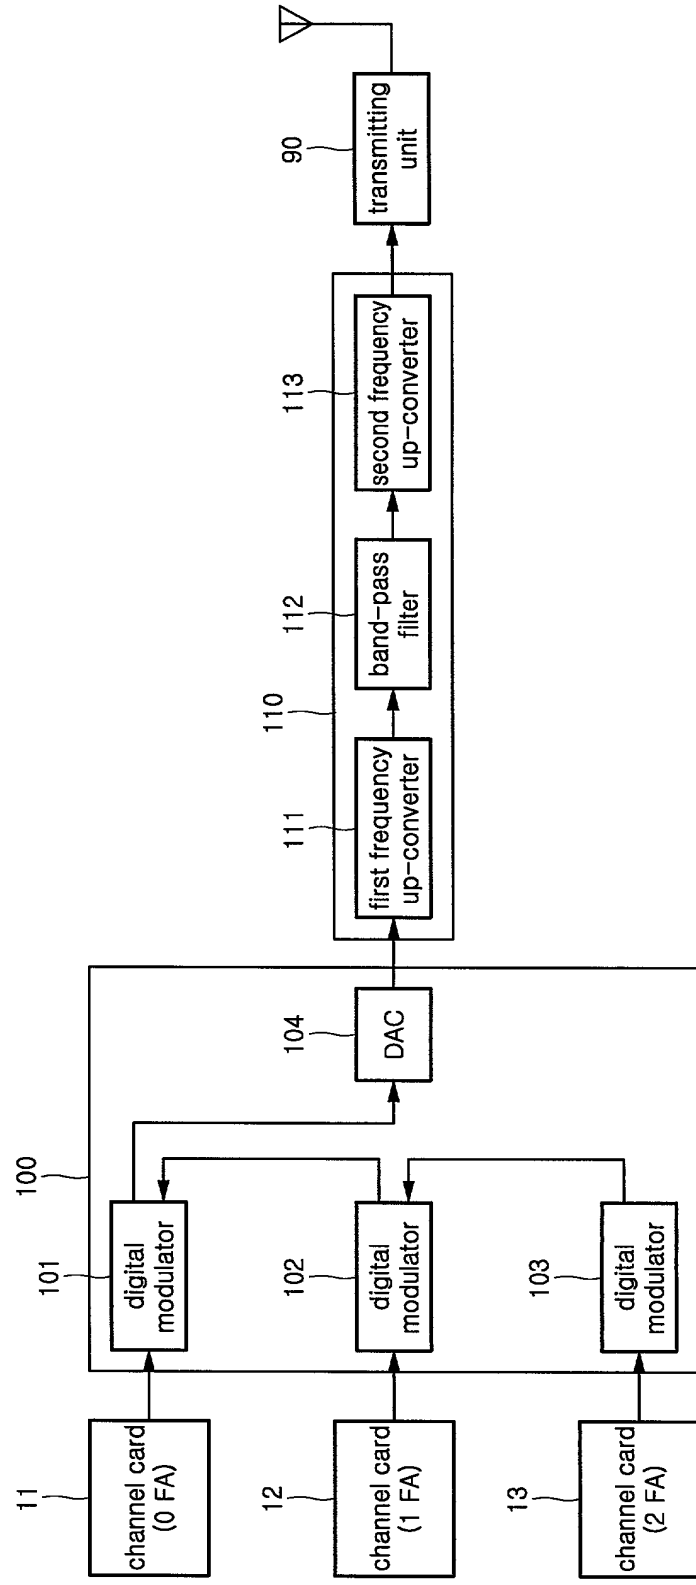


FIG. 7

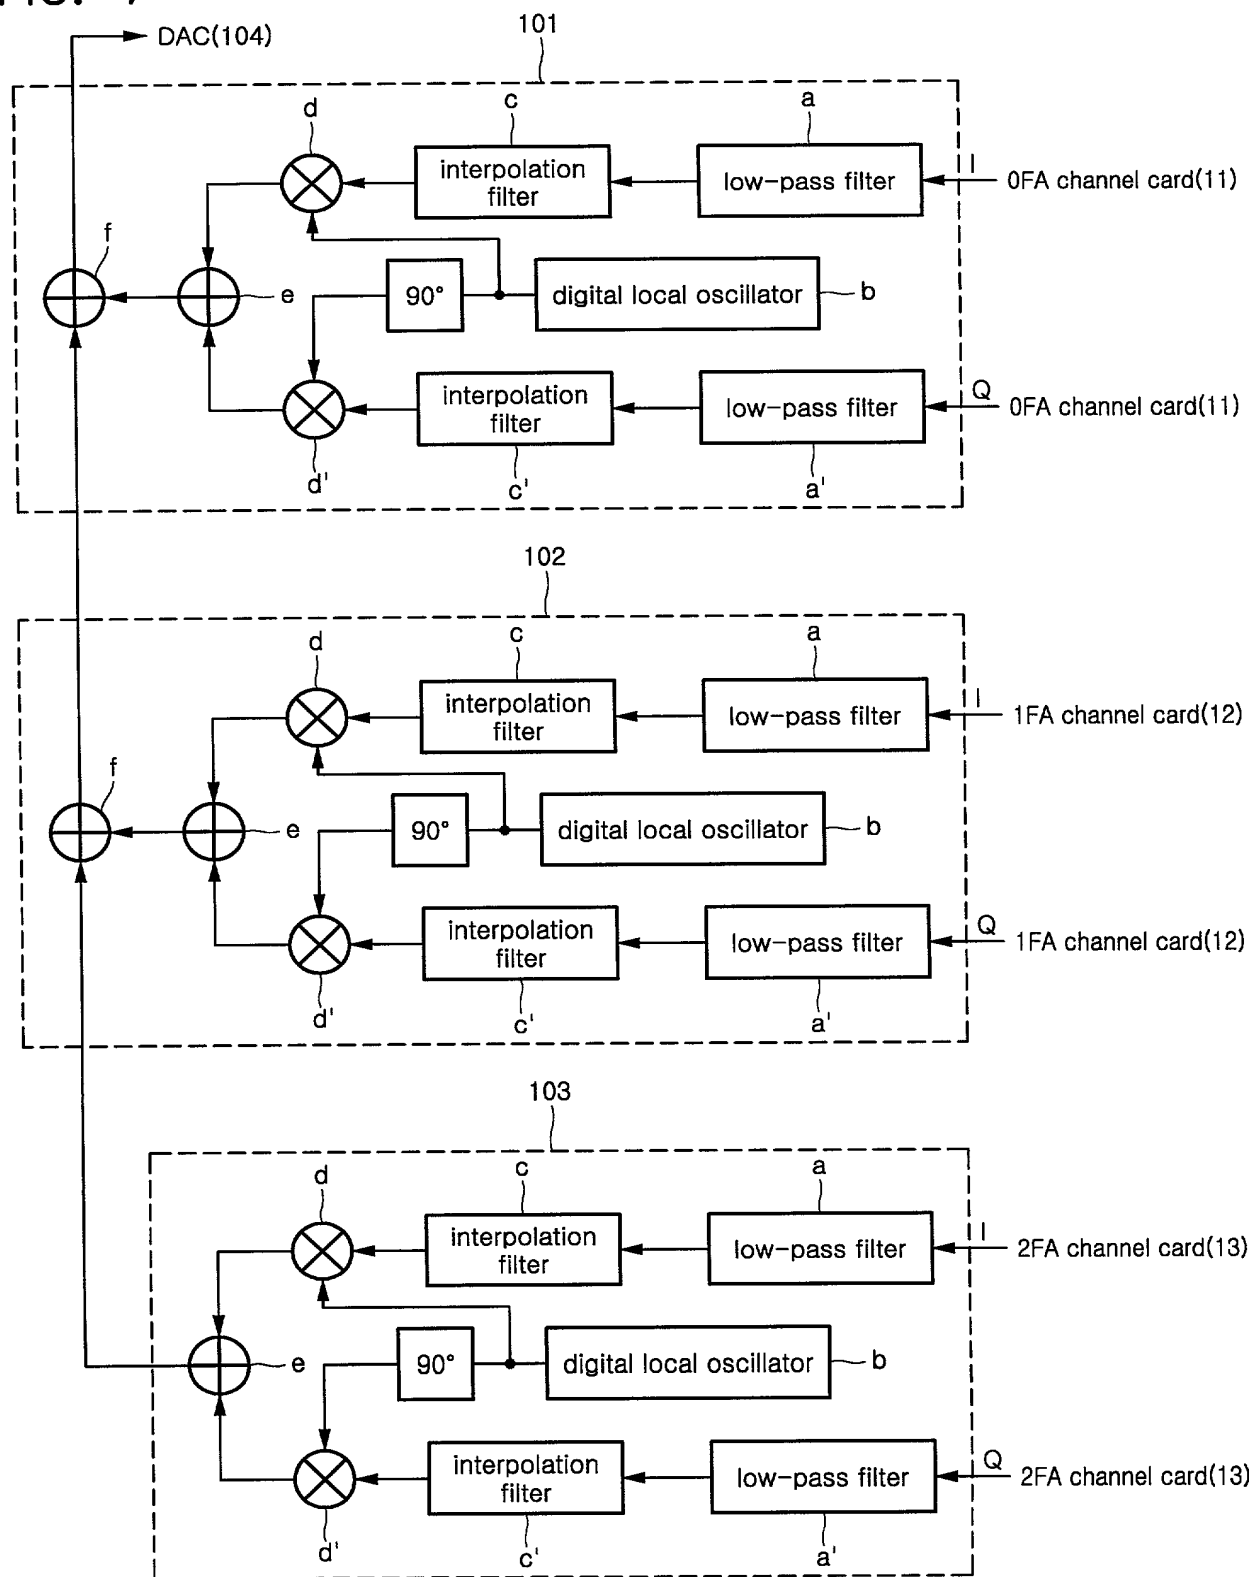

Docket No.
C34037/119442

Declaration For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)

☐ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed

Prior Foreign Application(s)

Priority Not Claimed

99-39093	KOREA	13 SEPTEMBER, 1999	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, CFR Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Full name of sole or first inventor	SUNG BAE MOON	
Sole or first inventor's	<i>Sung Bae Moon</i>	Date <i>August 30, 2000</i>
Residence	KYUNGKI-DO, KOREA	
Citizenship	REPUBLIC OF KOREA	
Post Office Address	102-1101 KODAM DORMITORY, SAN 72-1, KODAM-DONG, ICHON-CITY, KYUNGKI-DO, KOREA	

Full name of second inventor, if any	Date
Second inventor's signature	
Residence	
Citizenship	
Post Office Address	

Full name of third inventor, if any	Date
Third inventor's signature	
Residence	
Citizenship	
Post Office Address	

Full name of fourth inventor, if any	Date
Fourth inventor's signature	
Residence	
Citizenship	
Post Office Address	